

- ✓ *Muffel*
- ✓ *Ashing / Melting*
- ✓ *Thermal Processing*

## Laboratory Furnaces


**900 - 1300 °C**

### **1. High temperature electric furnaces**

- 1.1 Muffle furnaces with fiber-insulated chambers
- 1.2 Chamber furnaces with fiber-insulated chambers
- 1.3 Furnaces with ceramic chambers

### **2. Other thermal processing equipment**

- 2.1 Ashing furnaces
- 2.2 Tube furnaces
- 2.3 Weighing furnaces
- 2.4 Shaft furnaces

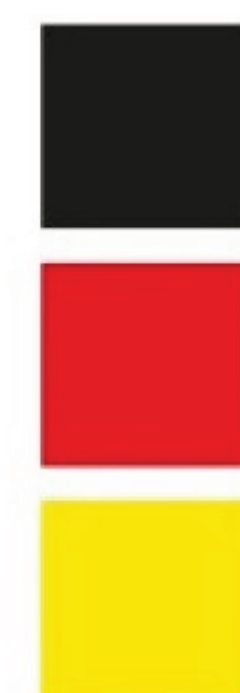

SCO Tech  
Auf der Heide 15  
D- 37351 Dingelstädt  
Federal Republic of Germany  
P: +49 (36075) 439340  
F: +49 (36075) 439308  
<http://www.sco-tech.com>



# Other thermal processing equipment

## Shaft furnaces

Our top-loading (shaft) low and high temperature electric laboratory furnaces are designed by professional engineers and made from high quality materials, which are manufactured in our factory, such as heavy-duty metal parts and thermal insulation materials. The furnaces are excellent for drying, hardening, preliminary heating, loosening, normalising and other thermal processes of up to 900 °C, which is mostly used in scientific laboratories, educational institutions, medicine and industry.

### Basic model

- Solid ceramic chamber or made from stainless steel
- Enclosed heating elements
- Door opens from the top
- Equipped with non-programmable controller Omron E5CC
- Ceramic bottom plate
- Low power consumption
- Fast heating time due to low thermal mass construction
- Good stability and uniformity
- Outside casing – metal sheet, powder painted grey

### Options

- Reinforced bottom
- Additional ceramic bottom plates
- Buzzer
- Digital timer
- OTP (over temperature protection)
- Data recorder
- Data communication/USB
- Calibration of temperature measurement system
- Table for supporting the furnace



LFS 10/900



LFS 75/550

Model	Vol., l	Tmax, °C	Chamber dimensions, mm			Outside dimensions, mm			Power, kW	Voltage, V	Weight, kg
			Width	Depth	Height	Width	Depth	Height			
LFS 10/900	10	900	190	210	405	770	850	1010	4.5	230	144
LFS 75/550	75	550	340	390	550	870	660	850	6.0	400	116

# Control devices

## Temperature controllers

Our products are equipped with high-precision digital microprocessor Omron or Eurotherm temperature controllers fitted with self-tuning and manual PID settings. Temperature measurement is supported by thermocouple. The customer can select a basic or programmable temperature controller, which offers up to 32 programming segments (rate of temperature rise or decrease control, maintenance of preset temperature, automatic shutdown). A wide range of devices allows to select the most appropriate controller for your process.

Omron E5CC



Eurotherm 3216



Eurotherm 3504



Omron E5CC-T



Eurotherm 3208



Eurotherm Nanodac



Model	Programmable	Number of programs	Number of steps in a program	Computer port	Control method		Control signal		
					PID	ON/OFF	Type		Nubers of auxiliary outputs
							Relay	Voltage	
Omron E5CC	○	1	2	●	●	●	●	●	3
Omron E5CC-T	●	8	32	●	●	●	●	●	3
Eurotherm 3216	○	1	8	●	●	●	●	●	2
Eurotherm 3208	●	5	8	●	●	●	●	●	3
Eurotherm 3508	●	50	50	●	●	●	●	●	2
Eurotherm 3504	●	50	50	●	●	●	●	●	5
Eurotherm Nanodac	●	100	25	●	●	●	●	●	5
Eurotherm E+PLC100 *	●	-	-	●	●	●	●	●	4

\* PID controller, recorder and PLC in one – designed for elaborate control algorithms.

# Control devices

## Eurotherm data recorders

Eurotherm data recorders are ideal for basic visualisation and recording requirements. They have a full colour display and utilise touch screen technology for clear and intuitive configuration and operation. Also, support of a USB port comes as standard to enable the use of a mouse, keyboard or a bar code scanner. Data can be moved manually or automatically archived to multiple locations: removable media, network servers or the Eurotherm Review database on a PC. These recorders can easily be integrated into a larger system and data files can be transferred across the network.

### Main features:

- Advanced data security and archiving
- 5.5", 1/4 VGA, Color touch screen display
- Designed for network and stand alone use
- FTP client and server
- Live, remote data viewing and configuration
- 125ms parallel sampling.



## Computer software SNOL V2.0

SNOL V2.0 is a computer software for data recording, viewing and configuring the temperature controller running your thermal treatment process. The software is designed for Windows operating system. Computer software allows to simply run, review and display charts on thermal process temperatures and other settings.

### Main features:

- Up to 128 controllers connection
- Supports up to 4 computer ports
- Control of device parameters and programs via computer
- Live, remote data viewing and configuration
- Graphical representation of the data
- Data export to Microsoft Excel format
- Ability to observe the process in a distance by internet
- Connections RS-232 and RS-485.
- Multiple language entry (ability to install necessary language).



## Timer Galaxy

The main function of the timer is remote start of the furnace. The timer works in real-time. During the operation, the output contact of the timer is operated according to the settings of the dial-switches. However, it is possible to manually override this operation for each channel individually at all times.

### Main features:

- Start and stop 24 hour / 7 day oven operation
- Stores up to 20 programs with up to 10 ON and 10 OFF events/day
- Manual 3-way override
- 16 Amp, 277 VAC resistive SPDT output contacts
- Reserve carryover: 3 years (Non-replaceable battery)
- Manual Daylight Time Changeover
- 3 languages option
- Available only with Omron devices.

